



Piezo4Haptic

Automated feedback from ultra-thin piezoelectric actuators

What is Piezo4haptic?

A haptic interface is a new type of man-machine interface, which allows the user to interact with the environment using his/her sense of touch.

Integrated piezoelectric actuators make the demonstrator screen vibrate imperceptibly based on a vibration mode of several tens of kHz. Vibration allows the user to feel complex haptic effects such as texturing or relief. The piezoelectric actuators are composed of 2 μm thick, aluminum nitride (AlN) deposited in ultra-thin layers.


Applications

All man-machine interfaces can be potentially enhanced by introducing a haptic effect. For example:

- Haptic smartphones
- Textile technology: virtually touching a garment on internet on a computer screen
- Automotive technology: introducing haptic buttons to car dashboards.

What's new?

Most demonstrators involving friction modulation use piezoelectric ceramics, which need to be glued manually to the screen. CEA-Leti is leveraging its 200 mm technological platform to deposit and etch actuators based on collective technologies, thereby ensuring time savings and low costs. The Institute is also offering a miniaturized solution via its ultra-thin piezoelectric actuators smaller than 3 μm versus 100 μm for current commercial ceramic actuators. CEA-Leti's thin layer actuators require only small actuation voltages, which also allow better integration.

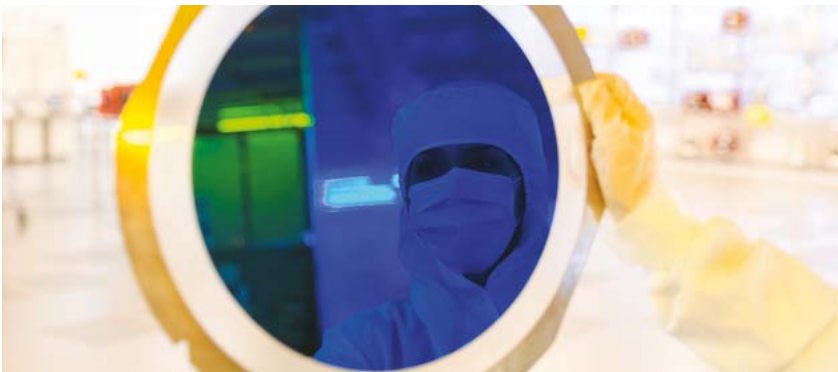

CES 2020

At CES 2020, Grenoble-based start-up Hap2U introduced a haptic smartphone, based on the same haptic friction modulation effect used in CEA-Leti's demonstrator.



What's next?

CEA-Leti is developing other actuator integration strategies, in particular Chip-in-flex, a technology allowing integration of piezoelectric actuators into a flexible substrate. Chip-in-flex will enable the haptic effect to be applied to curved and conformable surfaces by increasing actuating performance.

The Institute is also working on the development of technology that is capable of making piezoelectric actuators completely transparent.

Interested in this technology?

Commercial contact:
Pierre-Damien Berger
pierre-damien.berger@cea.fr
 +33 438 789 900

Technical contact:
Fabrice Casset
fabrice.casset@cea.fr
 +33 438 785 893

CEA-Leti, technology research institute

17 avenue des Martyrs, 38054 Grenoble Cedex 9, France

cea-leti.com

   @CEA-Leti

 Research
for industrial
innovation